

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (08970)

G05F 3-20

C 401005 MAT

Recherche

1/2

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 319 063

A2 + A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88202531.5

(51) Int. Cl. 4: G11C 5/00, G05F 3/20

(22) Date of filing: 14.11.88

F. 001

N 22343

(30) Priority: 17.11.87 NL 8702734

(43) Date of publication of application:
07.06.89 Bulletin 89/23(84) Designated Contracting States:
CH DE FR GB IT LI(71) Applicant: N.V. Philips' Gloeilampenfabrieken
Groenewoudseweg 1
NL-5621 BA Eindhoven(NL)(72) Inventor: Feller, Ernst
c/o INT. OCTROOIBUREAU B.V. Prof.
Holstlaan 6
NL-5656 AA Eindhoven(NL)(74) Representative: Strijland, Wilfred et al
INTERNATIONAAL OCTROOIBUREAU B.V.
Prof. Holstlaan 6
NL-5656 AA Eindhoven(NL)

(54) Voltage multiplier circuit and rectifier element.

(57) The invention relates to a voltage multiplier, comprising a series connection of rectifier elements which are alternately rendered conductive by alternately applying complementary clock signals to capacitances which are connected to junction points of pairs of neighbouring elements. The rectifier element is constructed by means of field effect transistors so that the well in the substrate in which the element is realized receives either the anode voltage or the cathode voltage. This prevents the occurrence of the so-called back-gate bias effect which increases the threshold voltage of the element and limits the output voltage of the voltage multiplier.

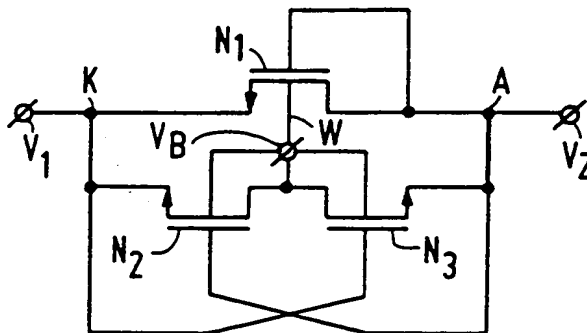


FIG. 4

EP 0 319 063 A2

"Voltage multiplier circuit and rectifier element."

The invention relates to an integrated voltage multiplier circuit, comprising a high-voltage output connected to a series connection of rectifier elements, each of which comprises a first field effect transistor, a buffer capacitance for charge storage being connected between the high-voltage output and a power supply terminal, a junction point of every pair of neighbouring elements being connected to one side of a booster capacitance where to clock signals are applied on the other side so that two booster capacitances connected to a respective side of one rectifier element receive clock signals of mutually opposed polarity.

The invention also relates to a rectifier element suitable for use in such a voltage multiplier circuit.

STATE OF THE ART

Voltage multiplier circuits of this kind are known, for example from IEEE Solid State Circuits, SC-11(3), June 1976, page 375, and are used inter alia in non-volatile electrically programmable and erasable memories.

A conventional voltage multiplier circuit for generating a negative output voltage comprises a series connection of PMOS transistors which are connected as diodes and which are realized in a P-well process, said series connection being connected at a cathode side to a point carrying a low supply voltage V_{SS} (ground) and comprising at an anode side an output with a buffer capacitance for supplying a high programming voltage. The buffer capacitance is connected between the output and a high supply voltage V_{DD} . The substrate in which these transistors are embedded is of the N-type and, in order to avoid the injection of charge carriers from the transistors to the substrate, it is coupled to the high supply voltage (V_{DD}). A junction point of each pair of neighbouring diodes is connected, via a respective booster capacitance, to either a first clock line or a second clock line, which clock lines carry logically complementary clock signals. The various booster capacitances alternately receive clock signals of opposed sign. Because the sign of the clock signals periodically changes, the diodes are alternately conductive and blocked and charge is transferred from one booster capacitance to the other via a conductive diode.

It is a drawback of the conventional voltage multiplier circuit that, as a voltage on a booster capacitance or on the buffer capacitance becomes more negative due to the transfer of charge, the threshold voltage of the transistor which is con-

nected to the relevant capacitance and which is connected as a diode increases due to the so-called back-gate bias effect. As a result, the ratio of the charge pumped through a rectifier element and the charge to be potentially transferred by means of a clock signal is reduced. The effectiveness of the unit: booster capacitance and rectifier element decreases. In this respect reference is made to "MOS/LSI Design and Application", W. Carr and J. Mize, McGraw-Hill, 1972, pp. 56-57.

The level of the output voltage of the voltage multiplier circuit is limited by this effect. The transfer of charge from the buffer capacitance, via the diode, to the next booster capacitance stops when the voltage swing between the clock lines is too small to raise the voltage on the anode of the diode one threshold voltage beyond the voltage on the cathode of the diode. In order to obtain a higher negative output voltage, a larger voltage swing and hence a higher supply voltage would be required.

Replacement of a PMOS transistor by an NMOS transistor connected as a diode and also realized by means of a P-well process, leads to problems of another kind. The P-well contact of the transistor is connected to the anode side of the diode; consequently, the cathode, the P-well and the substrate form an emitter, a base and a collector, respectively, of a parasitic npn transistor which draws current from the substrate. For example, International Patent Application PCT/US 83/01977, publication No. WO 84/02607, discloses a solution to this problem, involving an auxiliary voltage multiplier which keeps all wells at a sufficiently low negative voltage. The auxiliary multiplier, however, requires an additional amount of substrate surface area, increases the power dissipation and necessitates additional steps so as to reduce the effect of the parasitic transistors then occurring.

The above considerations also hold good for conventional voltage multiplier circuits for achieving a high positive output voltage by means of NMOS transistors in a P-well process, and also for voltage multiplier circuits realized by means of MOS transistors in an N-well process.

OBJECT OF THE INVENTION

It is an object of the invention to provide a voltage multiplier circuit incorporating a more effective voltage multiplication, where the output voltage is not limited by the back-gate bias effect or by the level of the supply voltage, and where conduction of the parasitic bipolar transistors is avoided.

To achieve this, a voltage multiplier circuit in

accordance with the invention is characterized in that the field effect transistors of the elements on a substrate are realized in separate regions of a conductivity type other than that of the substrate, at least the rectifier elements which are situated at a high-voltage side of the circuit comprising respective switching means which connect internal diodes, formed in the field effect transistor by a p-n junctions between a source and a drain, respectively, of the field effect transistor on the one side and the region on the other side, to either the source in the conductive state or to the drain in the blocked state of the field effect transistor, so that the internal diodes remain blocked. When the region is connected to the source of the field effect transistor in the conductive state of the latter, the back-gate bias voltage remains zero. When the region is connected to the drain of the field effect transistor in the blocked state of the latter, the parasitic bipolar transistor whose collector, base and emitter are formed by the substrate, the well and the drain, respectively, will not become conductive.

EMBODIMENTS OF THE INVENTION

c2 An embodiment of a voltage multiplier circuit in accordance with the invention is characterized in that the switching means of the first field effect transistor comprise a second and a third field effect transistor which are of the same conductivity type as the first field effect transistor and which are realized in respective regions which are coupled to the region of the first field effect transistor, a source of the second and the third field effect transistor being connected to a source and a drain, respectively, of the first field effect transistor, a control electrode of the second and the third field effect transistor being coupled to the drain and the source, respectively, of the first field effect transistor, the drains of the second and the third transistor being connected to the interconnected regions. The switching means in the form of a second and third transistor have a compact construction and need not be driven by additional control signals. Such a construction comprising NMOS transistors in a P-well is suitable for generating high negative voltages. A voltage multiplier constructed by means of PMOS transistors is suitable for generating high positive voltages.

A further embodiment of a voltage multiplier circuit in accordance with the invention is characterized in that the voltage multiplier circuit comprises a multi-phase clock signal generator for applying respective, mutually phase-shifted clock signals to respective booster capacitances, the clock signal applied to the source of the first field effect

transistor via the relevant booster capacitance changing sooner than the complementary clock signal applied to the drain of the first field effect transistor via the next booster capacitance. When a voltage across the first transistor is smaller than a threshold voltage, the regions are uncoupled from the main electrodes of the first transistor. The regions, however, retain the voltage they had at the instant of uncoupling, because the junction capacitance of the well has been charged.

When the voltage on the source is made to rise or decrease before the voltage on the drain of the first transistor decreases or increases, respectively, by applying phase-shifted, complementary clock signals to said main electrodes via the relevant booster capacitances, the bipolar parasitic transistor whose collector, base and emitter are formed by the substrate, the well and the source of the first transistor, respectively, will not become conductive.

A further embodiment of a voltage multiplier circuit in accordance with the invention is characterized in that the multi-phase clock signal generator comprises a series connection of a number of inverter circuits, respective outputs of two neighbouring inverter circuits being connected to respective electrodes of two neighbouring booster capacitances. The clock signal generator then comprises a series connection of inverter circuits for applying clock signals to the neighbouring booster capacitances in phase opposition, a gate delay of an inverter circuit causing the above-mentioned phase shift.

A preferred embodiment of a voltage multiplier circuit in accordance with the invention is characterized in that in the element between a connection point of the control electrode of the first and the second field effect transistor on the one side and the drain of the first field effect transistor on the other side there is provided a switchable charging or discharging path for charging or discharging the latter control electrodes, there being provided control means which are connected to the latter connection point via a coupling capacitance in order to increase or decrease a voltage on the latter control electrodes after they have been charged or discharged, respectively, via the switchable charging or discharging path. The voltage across the first field effect transistor is thus reduced to substantially zero in the forward direction because no threshold loss occurs. This threshold loss is avoided by adding to the control voltage already present on the control electrode of the first transistor, via the coupling capacitance, a control voltage originating from the control means.

Another embodiment of a voltage multiplier circuit in accordance with the invention in which the series connection of inverter circuits forms a part of a ring oscillator, is characterized in that the ring

oscillator comprises a flipflop, a flipflop output of which is fed back, via the inverters, to a first flipflop input, a second flipflop input receiving an enable signal. Because a flipflop is included in the ring oscillator, the ring oscillator can be switched off after a complete last clock pulse.

BRIEF DESCRIPTION OF THE FIGURES

The invention will be described in detail hereinafter with reference to a drawing; therein:

Fig. 1 shows an example of a conventional voltage multiplier circuit,

Figs. 2a, b and c show rectifier elements of the voltage multiplier circuit shown in Fig. 1,

Fig. 3 shows a circuit diagram of a rectifier element for a voltage multiplier circuit in accordance with the invention,

Fig. 4 shows a first embodiment of a rectifier element for a voltage multiplier circuit in accordance with the invention,

Fig. 5 shows a first embodiment of a voltage multiplier circuit in accordance with the invention,

Fig. 6 shows variations of signal voltages in the rectifier element as shown in Fig. 4, used in a voltage multiplier circuit as shown in Fig. 5,

Fig. 7 shows a second embodiment of a rectifier element for a voltage multiplier circuit in accordance with the invention, and

Fig. 8 shows a second embodiment of a voltage multiplier circuit in accordance with the invention.

CONVENTIONAL VOLTAGE MULTIPLIER CIRCUIT

Fig. 1 shows a conventional voltage multiplier circuit of the type generating a negative output voltage. Between the power supply terminal V_{SS} and the output V_{EE} there is arranged a series connection of rectifier elements D_1, D_2, \dots, D_n . Between the output V_{EE} and the power supply terminal V_{DD} there is connected a buffer capacitance C_{EE} . The respective junctions K_1, K_2, \dots, K_{n-1} are alternately connected, via an associated booster capacitance C_1, C_2, \dots, C_{n-1} , to clock lines Q and \bar{Q} which carry complementary clock signals. Because the clock signals Q and \bar{Q} are periodic, the rectifier elements having an even index, D_2, D_4, \dots , and the elements having an odd index, D_1, D_3, \dots , will periodically be blocked or conductive and conductive or blocked, respectively. Charge is then pumped, via a conductive element, from one booster capacitance to the next booster capacitance having a lower index. Charge is thus step-wise fetched from the buffer capacitance C_{EE} and ulti-

mately drained on the V_{SS} terminal.

CONVENTIONAL RECTIFIER ELEMENTS

Figs. 2a and b show conventional rectifier elements for a voltage multiplier circuit as shown in Fig. 1 which is constructed by means of field effect transistors. The element shown in Fig. 2a is a PMOS transistor which is connected as a diode and a substrate connection SU of which is connected to the positive supply terminal V_{DD} in order to avoid charge injection to the substrate. At the anode side A of the element shown, there will be a higher negative voltage as this element is situated nearer to the output V_{EE} in the series connection shown in Fig. 1. Because of the higher substrate-source voltage in such an element, the threshold voltage at which the element becomes conductive is also higher. This is because the threshold voltage increases as the substrate-source voltage increases. When a given substrate-source voltage is reached, the threshold voltage of the rectifier element becomes so high that the voltage swing on the clock lines Q and \bar{Q} is no longer sufficient to raise the voltage difference across the element D_n in the forward direction beyond the threshold voltage of the transistor.

The element shown in the Figs. 2b and 2c is an NMOS transistor which is connected as a diode and which is realized in a P-well. The well connection W is connected to the anode A in order to prevent charge injection to the well. If the voltage on the side of the cathode K is lower than that on the anode side, a parasitic bipolar transistor PB is set to the conductive state.

CIRCUIT DIAGRAM OF A RECTIFIER ELEMENT IN ACCORDANCE WITH THE INVENTION

Fig. 3 shows a circuit diagram of a rectifier element in accordance with the invention. The invention is based on the recognition of the fact that the element shown in the Figs. 2b and 2c is suitable as a rectifier element for the voltage multiplier circuit shown in Fig. 1 only if the voltage on the cathode terminal K cannot drop below that of the well and hence below that on the anode terminal A , so that the parasitic transistor PB becomes conductive. If the well connection according to the invention is always switched to the main electrode of the NMOS transistor which carries the lowest voltage, the problem described with reference to Fig. 2c is solved. This is shown in Fig. 3. In the transistor the diodes between the N diffusions for the main electrodes on the one side and the P-well on the other side are connected, depending on the

voltage on the cathode K and the anode A, to either the cathode terminal K or to the anode terminal A, so that the diodes are always blocked.

FIRST EMBODIMENT OF A RECTIFIER ELEMENT

Fig. 4 shows a first embodiment of a rectifier element for a voltage multiplier circuit in accordance with the invention. A P-well terminal W of a first NMOS transistor N_1 which is connected as a diode is coupled to the cathode K of the transistor N_1 across a second transistor N_2 and to the anode A of the transistor N_1 across a third transistor N_3 . The coupling of the control electrodes of the transistor N_2 and of the transistor N_3 to the anode A and the cathode K, respectively, of the transistor N_1 ensures that the P-well is always connected to the lowest voltage occurring on one of the main electrodes of the transistor N_1 , except when the voltage across the transistor N_1 is lower than a threshold voltage of the transistors N_2 and N_3 . In that case the P-well is uncoupled from the anode A as well as from the cathode K. However, the P-well maintains its voltage on the junction capacitance between the P-well and the substrate. In order to prevent the parasitic bipolar transistor PB as shown in Fig. 2c from becoming conductive due to the driving by means of the voltage on the junction capacitance, the voltage on the source of the transistor N_1 (junction K) must change before that on the drain (junction A). This will be described in detail hereinafter with reference to the Figs. 5 and 6.

FIRST EMBODIMENT OF A VOLTAGE MULTIPLIER CIRCUIT

Fig. 5 shows a first embodiment of a voltage multiplier circuit in accordance with the invention. This voltage multiplier circuit generates a negative output voltage V_{EE} . The series connection of the rectifier elements of the type described with reference to Fig. 4, R_1 , R_2 , ..., R_n , is connected to a power supply terminal V_{DD} at an anode side, via a buffer capacitance C_{EE} . Each of the junctions between two elements is connected, via booster capacitances, to a junction point between two inverters I_2 , I_3 , ..., I_n . The series connection of the inverters forms part of a ring oscillator RT which also includes a flipflop FF. The successive booster capacitances C_1 , C_2 , ..., C_{n-1} receive clock signals in phase opposition, as has already been described with reference to Fig. 1. Moreover, the clock signals applied to the successive booster capacitances are delayed with respect to one another by a time interval which equals one inverter delay. This

inverter delay ensures that the voltage on the source (for example, the junction V_2) of the first transistor in an element (for example, R_2) changes before the voltage on the drain (for example, junction point V_3) of said first transistor changes. As has already been stated, this serves to prevent parasitic bipolar transistors from becoming conductive in blocked rectifier elements, thus disturbing the potential built up at said rectifier element. Flip-flop FF is included in the ring oscillator RT in order to ensure that, when the ring oscillator is switched off by means of the enable signal EVM, the last clock pulse is still fully passed on, resulting in better defined states in the oscillator.

SIGNAL VARIATIONS

Fig. 6a shows the variation of the voltages denoted by the references V_1 and V_2 in Fig. 5 and the references V_1 , V_2 and V_B in Fig. 4. Fig. 6b shows the variation of these signals if the signals on the source of the first transistor in an element were to change simultaneously with the signals on its drain. Signal V_1 is the signal on the source of the transistor N_1 of Fig. 4 and V_2 is the signal on the drain of the transistor N_1 . The signal V_2 has a lower mean value than V_1 because charge is steadily drained from the buffer capacitance C_{EE} , having a high negative voltage, across the various stage capacitances C_1 , C_2 , ..., C_n , to V_{SS} . The transistor N_2 of Fig. 4 receives a control voltage $V_2 - V_1$, the transistor N_3 receiving a control voltage $V_1 - V_2$. These control voltages are also shown in the Figs. 6a and 6b. When a control voltage exceeds a threshold V_T , the relevant transistor is conductive. A variation of the voltage V_B of the P-well can thus be simply illustrated. When both said control voltages drop below the threshold V_T , the well is uncoupled from the main electrodes of the transistor N_1 . However, the well maintains its voltage because of the charge stored on its junction capacitance. Signal V_B remains below or equal to one of the voltages V_1 and V_2 throughout Fig. 6a in which the signal V_2 is delayed with respect to V_1 . For the sake of clarity, the actually coincident line segments are shown to be slightly separated in the drawing, but this has no significance. In Fig. 6b, however, where V_1 and V_2 change their sign simultaneously, the arrow X denotes the voltage variation where V_B exceeds V_1 and the arrow Y denotes the voltage variation where V_B exceeds V_2 . In both situations the previously mentioned parasitic bipolar transistor becomes conductive and undesirable loss of charge occurs.

PREFERRED EMBODIMENT OF A RECTIFIER

ELEMENT

Fig. 7 shows a preferred embodiment of a rectifier element for an integrated voltage multiplier circuit in accordance with the invention. Parts which correspond to those shown in Fig. 4 are denoted by corresponding reference numerals. The rectifier transistor N_1 and the second transistor N_2 are no longer controlled by the forward voltage on the junction point A, as was the case in the circuit shown in Fig. 4. The connection between the drain of N_1 and the control electrode of N_1 is now formed by a current path which can be switched on and off and which comprises a gate transistor N_5 which is connected as a diode and a gate transistor N_4 which is connected thereto in anti-parallel and which is controlled by a voltage on the junction point K. When the voltage V_2 on the junction point A increases and the voltage V_1 on the junction point K decreases, first the control electrodes of the rectifier transistor N_1 and of the second transistor N_2 will receive a control voltage via the gate transistor N_5 . Only after that an additional control voltage V_G in the form of a pulse will be added to the control voltage already present, via a coupling capacitance C_p . The control voltage for the transistor N_1 then increases by such an amount with respect to the voltage V_2 that no threshold losses occur across the transistor N_1 and the voltage V_1 in principle becomes equal to V_2 . When the voltage V_1 subsequently increases again, the charge on the control electrode of the transistor N_1 is drained again via the gate transistor N_4 . Such an element is suitable for use in the voltage multiplier circuit as described with reference to the next Figure.

PREFERRED EMBODIMENT OF A VOLTAGE MULTIPLIER CIRCUIT

Fig. 8 shows a second embodiment of a voltage multiplier circuit in accordance with the invention. Parts which correspond to those shown in Fig. 5 are denoted by corresponding reference numerals. The series connection of rectifier elements G_1, G_2, \dots, G_n now comprises rectifier elements of the type shown in Fig. 7. Each of these elements G_1, G_2, \dots, G_n comprises an additional control input coupled to an associated NOR-gate B_1, B_2, \dots, B_n . An output of such a NOR-gate supplies the pulse signal V_G , described with reference to Fig. 7, on the coupling capacitance C_p . The operation will be described with reference to the element G_1 of Fig. 8 which is explicitly shown in Fig. 7. When the voltage V_2 exceeds the voltage V_1 , the transistor N_4 is blocked. The NOR-gate B_1 initially supplies an output signal equal to V_{SS} . When the voltage V_2 increases, the control electrode of the transistor N_1

is raised to a higher voltage via the source follower N_5 . When subsequently the full forward voltage $V_2 - V_1$ has been built up across the transistor N_1 , the NOR-gate B_1 switches the output signal from V_{SS} to V_{DD} , thus pressing, via the coupling capacitance C_p , the voltage on the control electrode of the transistor N_1 beyond the voltage V_2 . Consequently, the transistor N_1 will no longer cause threshold voltage losses ($V_1 = V_2$). At the end of this charging operation, the NOR-gate B_1 changes over from V_{DD} to V_{SS} , after which the reverse voltage $V_1 - V_2$ is built up across the transistor N_1 . The correct phase for driving the elements via the NOR-gate is derived from the voltages on the inputs and outputs of the inverters $I_{-1}, I_0, I_1, \dots, I_{n+2}$ of the ring oscillator.

Claims

1. An integrated voltage multiplier circuit, comprising a high-voltage output connected to a series connection of rectifier elements, each of which comprises a first field effect transistor, a buffer capacitance for charge storage being connected between the high-voltage output and a power supply terminal, a junction point of every pair of neighbouring elements being connected to one side of booster capacitance whereto clock signals are applied on the other side so that two booster capacitances connected to a respective side of one rectifier element receive clock signals of mutually opposed polarity, characterized in that the field effect transistors of the elements on a substrate are realized in separate regions of a conductivity type other than that of the substrate, at least the rectifier elements which are situated at a high-voltage side of the circuit comprising respective switching means which connect internal diodes, formed in the field effect transistor by a p-n junctions between a source and a drain, respectively, of the field effect transistor on the one side and the region on the other side, to either the source in the conductive state or to the drain in the blocked state of the field effect transistor, so that the internal diodes remain blocked.

2. An integrated voltage multiplier circuit as claimed in Claim 1, characterized in that the switching means of the first field effect transistor comprise a second and a third field effect transistor which are of the same conductivity type as the first field effect transistor and which are realized in respective regions which are coupled to the region of the first field effect transistor, a source of the second and the third field effect transistor being connected to a source and a drain, respectively, of the first field effect transistor, a control electrode of the second and the third field effect transistor be-

ing coupled to the drain and the source, respectively, of the first field effect transistor, the drains of the second and the third transistor being connected to the interconnected regions.

3. An integrated voltage multiplier circuit as claimed in Claim 2, characterized in that the voltage multiplier circuit comprises a multi-phase clock signal generator for applying respective, mutually phase-shifted clock signals to respective booster capacitances, the clock signal applied to the source of the first field effect transistor via the relevant booster capacitance changing sooner than the complementary clock signal applied to the drain of the first field effect transistor via the next booster capacitance.

4. An integrated voltage multiplier circuit as claimed in Claim 3, characterized in that the multi-phase clock signal generator comprises a series connection of a number of inverter circuits, respective outputs of two neighbouring inverter circuits being connected to respective electrodes of two neighbouring booster capacitances.

5. An integrated voltage multiplier circuit as claimed in Claim 4, characterized in that the output and the input of the last inverter circuit of the series connection are connected respectively to the electrode of the booster capacitance that is connected to one side of a last rectifier element, the other side of which rectifier element forms the output of the voltage multiplier, and to the neighbouring booster capacitance, which is connected to the last rectifier element but one.

6. An integrated voltage multiplier circuit as claimed in Claim 4 or 5, characterized in that the series connection of inverter circuits forms part of a ring oscillator.

7. An integrated voltage multiplier circuit as claimed in Claim 2, 3, 4, 5 or 6, characterized in that in the element between a connection point of the control electrode of the first and the second field effect transistor on the one side and the drain of the first field effect transistor on the other side there is provided a switchable charging or discharging path for charging or discharging the latter control electrodes, there being provided control means which are connected to the latter connection point via a coupling capacitance in order to increase or decrease a voltage on the latter control electrodes after they have been charged or discharged, respectively, via the charging or discharging path.

8. An integrated voltage multiplier circuit as claimed in Claim 7, characterized in that the charging or discharging path comprises a fourth and a fifth field effect transistor, both transistors being of the same conductivity type as the first field effect transistor and being realized in respective regions which are coupled to that of the first field effect

transistor, a drain and a control electrode of the fourth field effect transistor being connected to the drain of the first field effect transistor, a source of the fourth field effect transistor being connected to the junction point of the control electrodes of the first and the second field effect transistor, a drain of the fifth field effect transistor being connected to the latter junction point and a source and a control electrode of the fifth field effect transistor being connected to the drain and the source, respectively, of the first field effect transistor.

9. An integrated voltage multiplier circuit as claimed in the Claims 4, 5 or 6 and the Claim 7 or 8, characterized in that the control means comprise a logic gate, a gate output of which is connected to the coupling capacitance and respective gate inputs of which are connected between the inverter circuits.

10. An integrated voltage multiplier circuit as claimed in Claim 9, characterized in that, when the respective elements are constructed by means of NMOS transistors in respective P-wells, the logic gate is a NOR-gate, a gate output of which is connected to the coupling capacitance, a first gate input receiving a clock signal two inverter delays sooner than the source of the first field effect transistor, a second gate input receiving a clock signal two inverter delays later than the source of the first field effect transistor.

11. An integrated voltage multiplier circuit as claimed in Claim 9, characterized in that, when the respective elements are constructed by means of PMOS transistors in respective N-wells, the logic gate is a NAND-gate, a gate output of which is connected to the coupling capacitance, a first gate input receiving a clock signal two inverter delays before the source of the first field effect transistor, a second gate input receiving a clock signal two inverter delays later than the source of the first field effect transistor.

12. An integrated voltage multiplier circuit as claimed in Claim 6, characterized in that the ring oscillator comprises a flipflop, a flipflop output of which is fed back, via the inverters, to a first flipflop input, a second flipflop input receiving an enable signal.

13. An integrated voltage multiplier circuit as claimed in any one of the preceding Claims in combination with an electrically programmable and erasable memory.

14. A rectifier element suitable for use in a voltage multiplier circuit as claimed in any one of the Claims 1, 2, 7 or 8.

15. A ring oscillator suitable for use in a voltage multiplier circuit as claimed in Claim 12.

THIS PAGE BLANK (uspto)

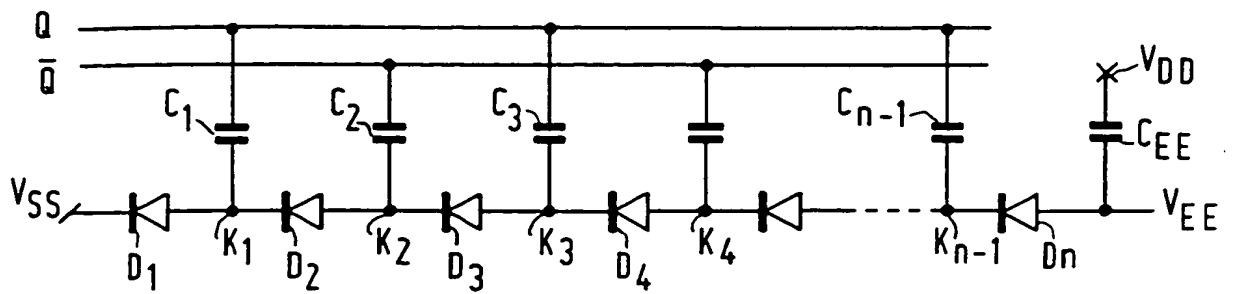


FIG. 1




FIG. 2a




FIG. 2b

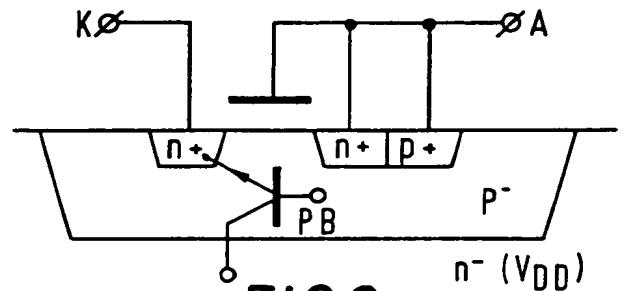


FIG. 2c




FIG. 3

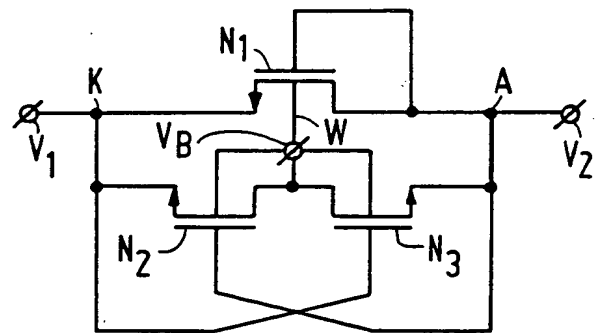


FIG. 4

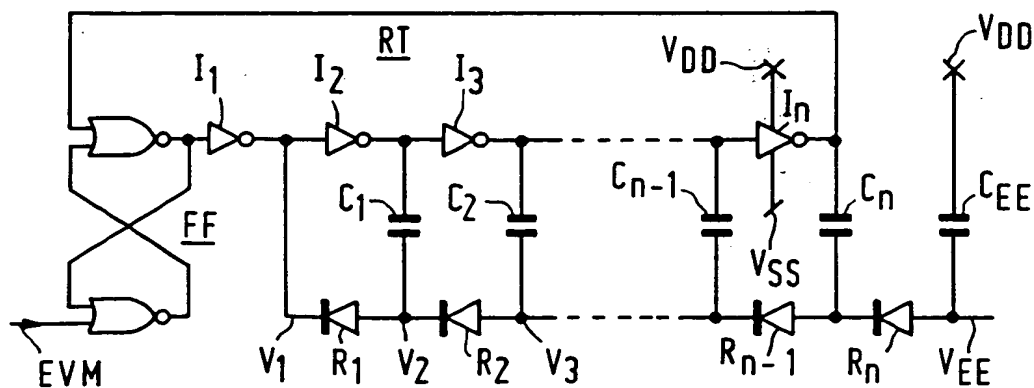


FIG. 5

THIS PAGE BLANK (USPTO)

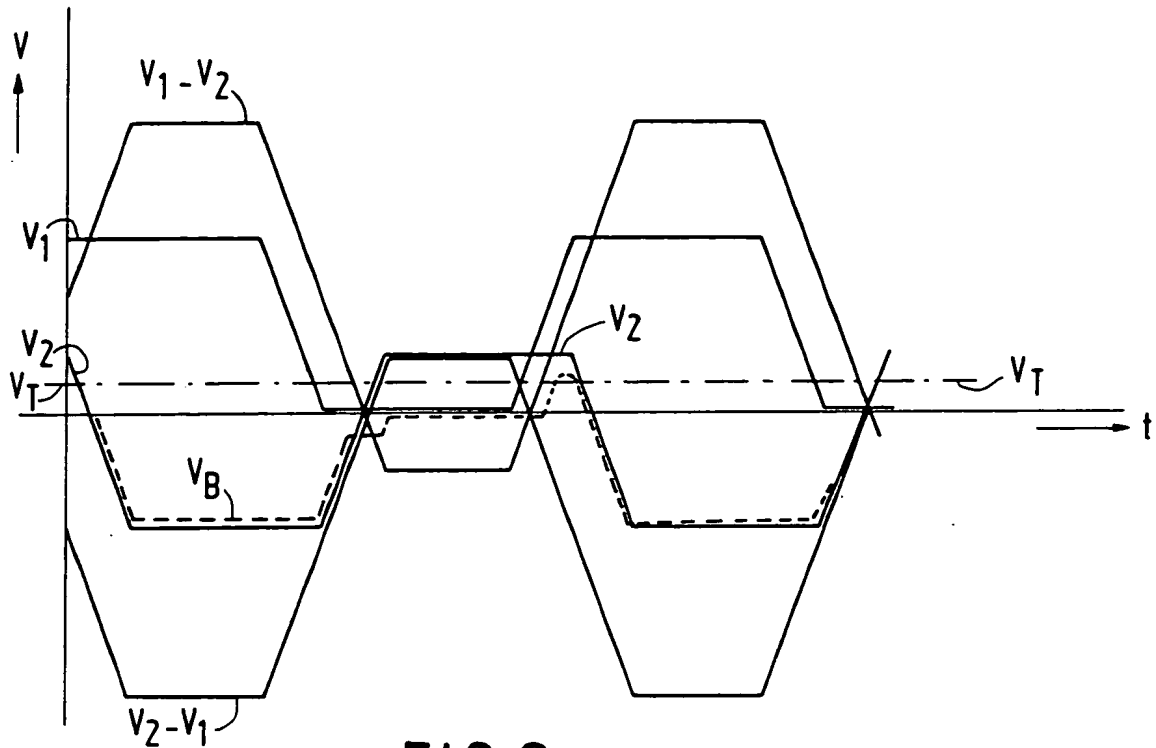


FIG. 6a

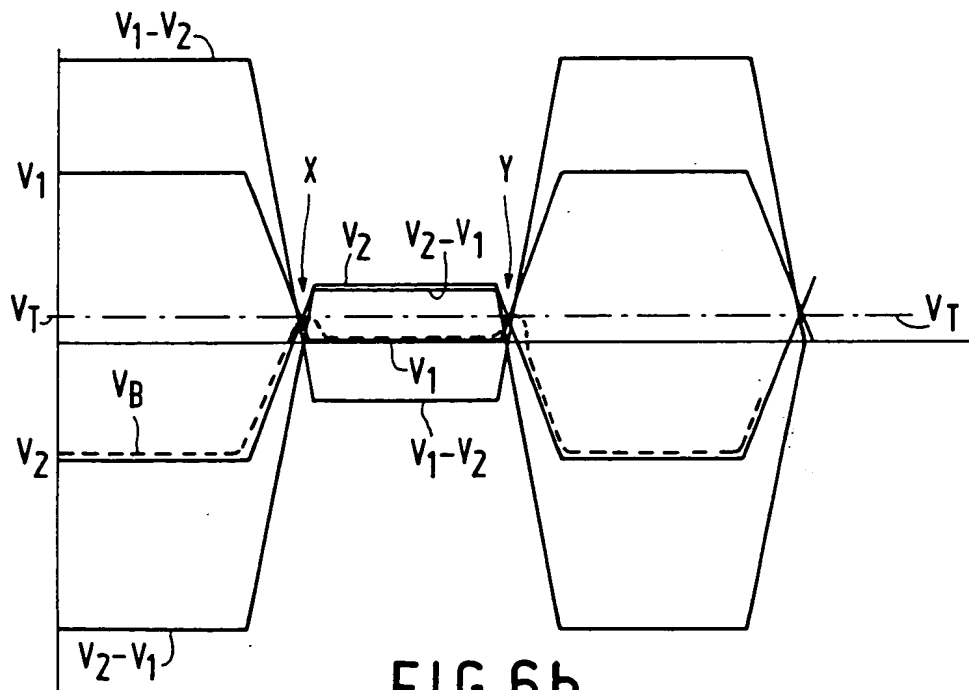


FIG. 6b

THIS PAGE BLANK (use 70)

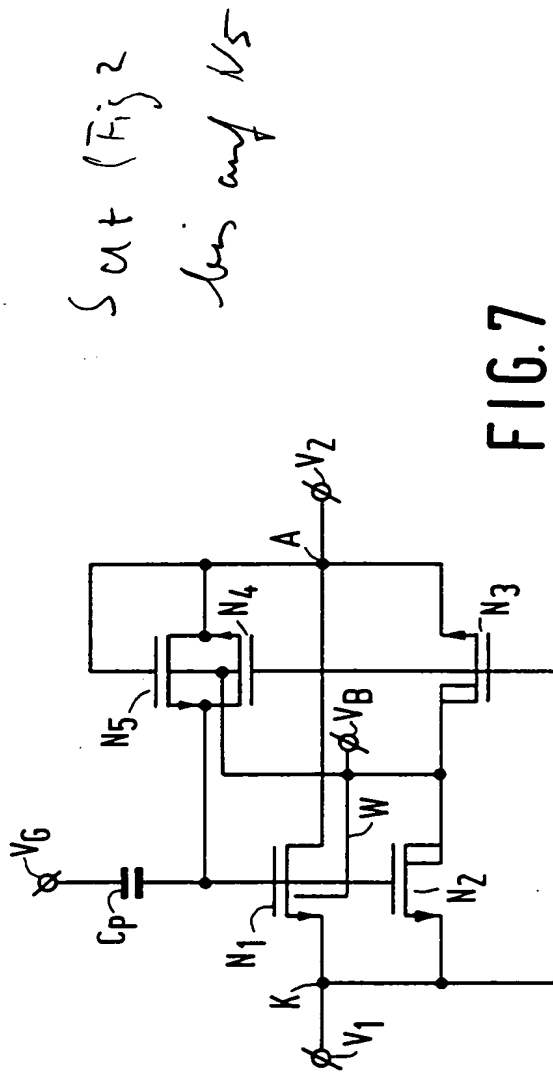


FIG.7


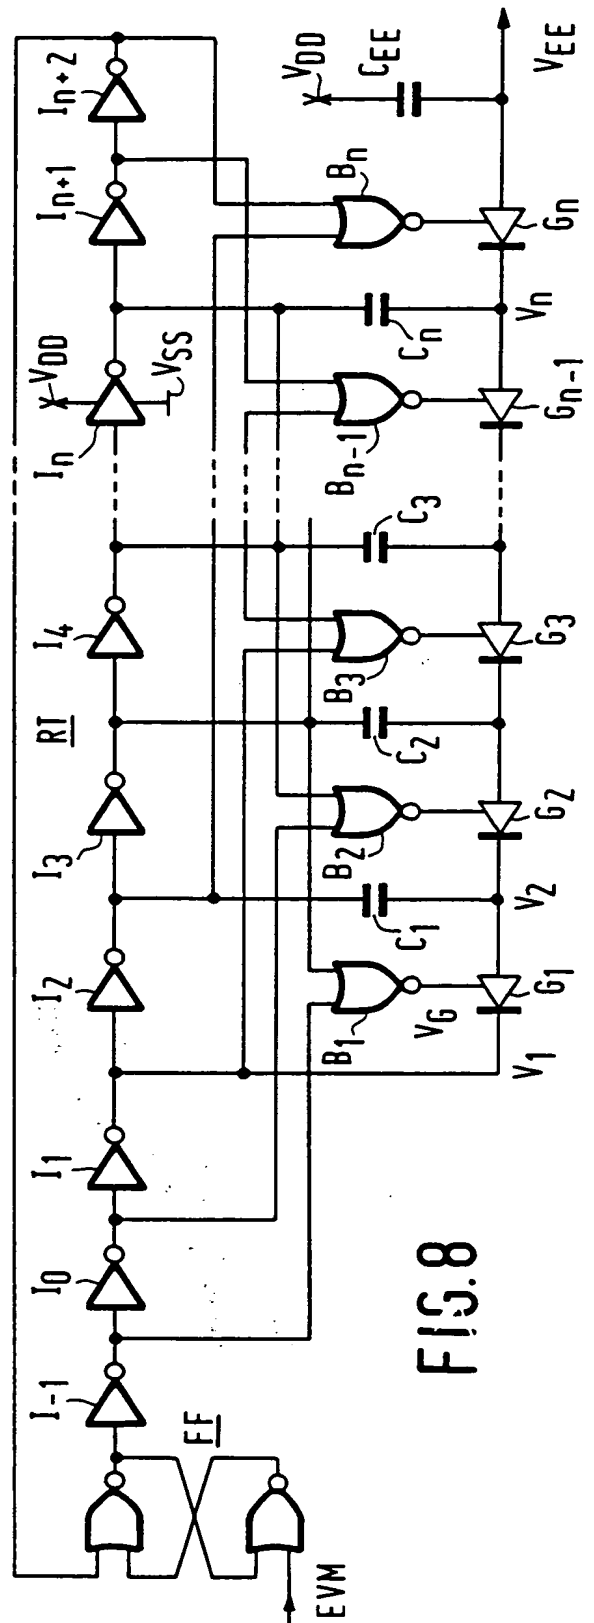


FIG.8

THIS PAGE BLANK (user)

G 0 5 F 3 / 2 0

Recherche

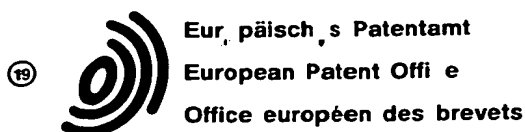

(11) Publication number:

0 319 063
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88202531.5

(51) Int. Cl.⁴: G 11 C 5/00
G 05 F 3/20

(22) Date of filing: 14.11.88

Regi

(30) Priority: 17.11.87 NL 8702734

(43) Date of publication of application:
07.06.89 Bulletin 89/23(84) Designated Contracting States:
CH DE FR GB IT LI(88) Date of deferred publication of search report:
21.06.89 Bulletin 89/25(71) Applicant: N.V. Philips' Gloeilampenfabrieken
Groenewoudseweg 1
NL-5621 BA Eindhoven (NL)(72) Inventor: Feller, Ernst
c/o INT. OCTROOIBUREAU B.V. Prof. Holstlaan 6
NL-5656 AA Eindhoven (NL)(74) Representative: Strijland, Wilfred et al
INTERNATIONAAL OCTROOIBUREAU B.V. Prof.
Holstlaan 6
NL-5656 AA Eindhoven (NL)

(54) Voltage multiplier circuit and rectifier element.

(57) The invention relates to a voltage multiplier, comprising a series connection of rectifier elements which are alternately rendered conductive by alternately applying complementary clock signals to capacitances which are connected to junction points of pairs of neighbouring elements. The rectifier element is constructed by means of field effect transistors so that the well in the substrate in which the element is realized receives either the anode voltage or the cathode voltage. This prevents the occurrence of the so-called back-gate bias effect which increases the threshold voltage of the element and limits the output voltage of the voltage multiplier.

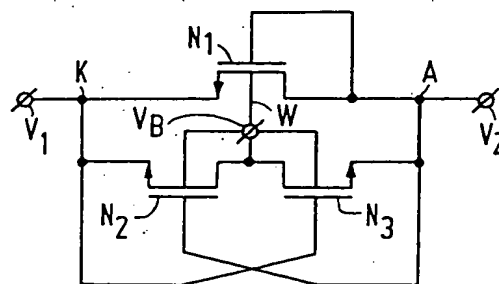


FIG. 4

EP 0 319 063 A3

THIS PAGE BLANK (0070)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 88 20 2531

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
D,A	WO-A-8 402 607 (NCR CORP.) * Page 6, line 18 - page 9, line 15; figures 4,5 * ---	1	G 11 C 5/00 G 05 F 3/20
A	US-A-3 657 575 (KENJI TANIGUCHI) * Whole document * ---	1	
A	EP-A-0 215 429 (TOSHIBA) * Page 5, line 35 - page 11, line 6; figures 2-5 * ---	1	
A	US-A-4 539 490 (TOSHIBA) * Column 2, line 48 - column 4, line 5; figures 1-3 * ---	1	
D,A	IEEE JOURNAL OF SOLID-STATE CIRCUITS, vol. SC-11, no. 3, June 1976, pages 374-378, New York, US; J.F. DICKSON: "On-chip high-voltage generation in MNOS integrated circuits using an improved voltage multiplier technique" -----	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			G 11 C 17/00 G 11 C 5/00 G 11 C 11/24 G 05 F 3/20
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28-03-1989	Examiner DEGRAEVE L.W.G.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

THIS PAGE BLANK (USPTO)

Voltage multiplier circuit and rectifier element.

Octrooinummer: EP0319063
Publicatiedatum: 1989-06-07
Uitvinder: FELLER ERNST
Aanvrager:: PHILIPS NV (NL)
Aangevraagd Octrooi: ☐ EP0319063, A3, B1
Aanvraagnummer: EP19880202531 19881114
Prioriteitsnummer: NL19870002734 19871117
IPC Classificatie: G05F3/20 ; G11C5/00
EC Classificatie: G11C5/14P, H02M3/07S
Equivalenten: DE3870592, ☐ JP1164264, JP2628724B2, ☐ NL8702734, ☐ US4922403

Samenvatting

The invention relates to a voltage multiplier, comprising a series connection of rectifier elements which are alternately rendered conductive by alternately applying complementary clock signals to capacitances which are connected to junction points of pairs of neighbouring elements. The rectifier element is constructed by means of field effect transistors so that the well in the substrate in which the element is realized receives either the anode voltage or the cathode voltage. This prevents the occurrence of the so-called back-gate bias effect which increases the threshold voltage of the element and limits the output voltage of the voltage multiplier.

Gegevens geleverd door esp@cenet - I2

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)